



GAS DETECTION **OELD**

Bluetooth-enabled Local Display
for Searchline Excel and Searchpoint Optima Plus

Honeywell

MAINTENANCE FROM THE PALM OF YOUR HAND

Bluetooth-enabled local display for Searchpoint Optima Plus and Searchline Excel

The Optima Excel Local Display (OELD) is a smart junction box for the Searchpoint Optima Plus and Searchline Excel infrared detectors for flammable hydrocarbons. The OELD includes an LCD screen for gas information, a “traffic light” indicator for at-a-glance detector status, and Bluetooth® connectivity for simplified, non-intrusive maintenance. Simply pair the OELD with our intrinsically safe, ruggedized smartphone; then use the OELD smartphone app to interact with the gas detector from up to 10 meters (30 feet) away. For maximum flexibility, the gas detector can be mounted either directly or remotely to OELD to suit any situation.

SIMPLIFIED MAINTENANCE WITH FAMILIAR SMARTPHONE TECHNOLOGY

When you pair a smartphone with OELD, you can perform many tasks for your Searchpoint Optima Plus and Searchline Excel detectors wirelessly and from a convenient position.

Use the OELD mobile app to specify the target gas, configure alarm set points, perform one-man calibrations, access event logs, perform diagnostics, check detector status and more — with no need to go back and forth to the control room, or open the enclosure on your gas detector. That means no hot-work headaches like obtaining permits, declassifying the area or adding more manpower.

For detectors in hard-to-reach locations such as a duct, you can position the corresponding OELD remotely in an easy-to-access location and use the OELD smartphone app to interact with the detector wirelessly.



FEATURES

- Robust aluminium or stainless steel housing
- Worldwide approvals for hazardous areas including ATEX, IECEx, cULus
- Green/yellow/red/blue multi-colour backlight to show status
- Bluetooth® (BLE) range up to 10 m (30 feet)
- Ingress protection IP66 / Type 4X
- Assessed to have no effect on functional safety of connected gas sensor
- Backward compatible with all versions of Searchpoint Optima Plus and Searchline Excel
- Secure access to OELD units can be easily managed by a primary user via the OELD app



AT-A-GLANCE VISIBILITY

OELD has bright indicator lights visible from a distance, where green indicates normal operation, yellow indicates a fault or maintenance and red indicates an alarm. The LCD screen clearly displays real-time readings on detector status, including the gas being monitored, the local gas concentration and units of measurement — so you have easy access to status information.

GAS DETECTION THAT FITS THE WAY YOU WORK

The OELD smartphone app delivers the familiar user experience you expect — combined with gas detection technology designed to keep you safe while making your job easier. It simplifies detector maintenance and is a cost-effective way to get even more value from your Searchpoint Optima Plus or Searchline Excel gas detectors.

NOW YOU CAN REDUCE TIME AND COST by managing maintenance from your smartphone — with at-a-glance assurance of your gas safety.

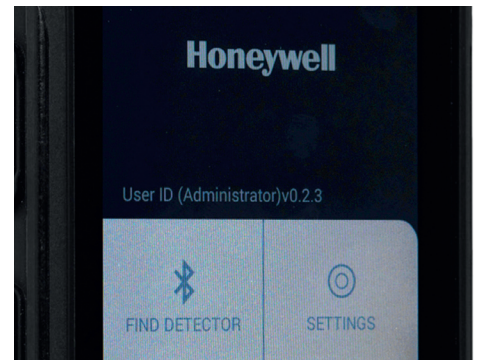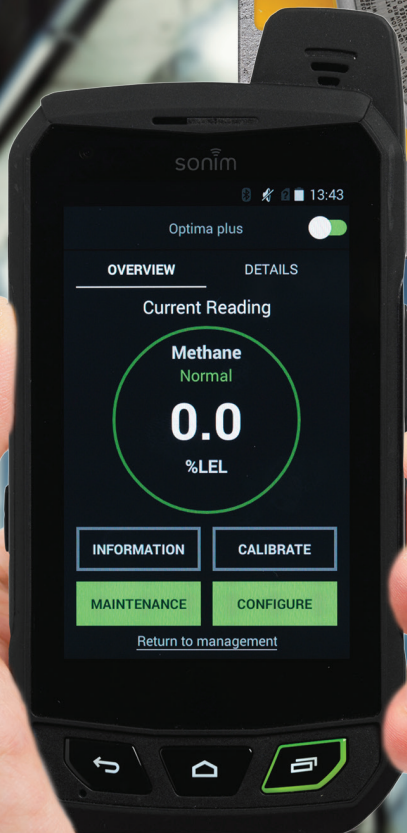

EASE OF MAINTENANCE

- Simplified maintenance with familiar smartphone technology
- Non-intrusive interaction to reduce time and safety risk
- Easy access to hard-to-reach detectors
- Know before you go pre-empt maintenance issues



LOCAL VISIBILITY OF SAFETY ISSUES

- Bright “traffic light” indicator for safety awareness
- Easier to locate a unit in fault/warning
- Real-time gas readings

OELD SPECIFICATION

MATERIAL	Marine-grade aluminium alloy or 316 stainless steel with 5-coat painted finish
WEIGHT	Aluminium version 2.3 kg (5 lb), stainless steel version 5.0 kg (11 lb)
DIMENSIONS	159 x 197 x 114 mm (6 1/4 x 7 3/4 x 4 1/2 inch)
CABLE ENTRIES	5 x M25 (ATEX/IECEx version) or 5 x 3/4" NPT (cULus version). One reserved for sensor connection. 3 blanking plugs supplied for unused entries.
TERMINATION	2 x pluggable rising-clamp type for connection to gas detector and field wiring. Accepts cable sizes of 0.5 to 2.5mm ² , 12 to 28 AWG
STORAGE TEMPERATURE	-40 to +65 °C (-40 to 149 °F)
OPERATIONAL TEMPERATURE	-40 to +65 °C (-40 to 149 °F) -60 to +65 °C (-76 to 149 °F) (CU TR-EX version only)
HUMIDITY	0 to 99% RH (non-condensing)
DISPLAY	LCD module showing digital readout of sensor output, bar chart representation, units of measurement, status icons for alarm, maintenance and active Bluetooth connection. Magnetic switch interface.
CONFIGURABLE DISPLAYED INFORMATION	Displayed information fully user-configurable using the OELD mobile app. Units of measurement selectable from: <ul style="list-style-type: none">• %LEL, %VOL, ppm, kppm, mg/m³, g/m³ (point detectors)• LEL.m, ppm.m (open path detectors)• mA, A, dB, DBA (other) Gas name (up to 4 alpha-numeric characters) Measurement range
VISUAL INDICATION	Green/yellow/red/blue multi-colour backlit display for indication of detector and OELD status. Green (normal) indication can be disabled via app.
POWER SUPPLY	18 to 32 Vdc (24 Vdc nominal), <2 W
INTERFACES	Bluetooth® (BLE) non-intrusive connection to suitable mobile device running the OELD mobile app. Range up to 10 m (30 feet) (mobile device dependant) Internal RS-485 connection to Searchpoint Optima Plus or Searchline Excel via SHC-1 through the SHC Protection Device 3 switch magnetic interface using the tool provided
COMPATIBLE GAS DETECTORS	Searchpoint Optima Plus, Searchline Excel, Searchline Excel Cross-Duct, generic 4 to 20 mA devices
ENVIRONMENTAL PROTECTION	IP66 / Type 4X (in accordance with NEMA 250)
CORE APPROVALS	EN 50270: 2015 (EMC) IEC/EN/UL/CSA 61010 (Electrical Safety)

HONEYWELL GAS DETECTION

Honeywell is able to provide gas detection solutions to meet the requirements of all applications and industries. Contact us in the following ways:

Find out more:

www.honeywellanalytics.com
www.raesystems.com

Technical Services:

EMEA: HAexpert@honeywell.com
US: ha.us.service@honeywell.com
AP: ha.ap.service@honeywell.com
www.honeywell.com

Customer Service:

Tel: 00800 333 222 44
(Freephone number)
Tel: +41 44 943 4380
(Alternative number)
Fax: 00800 333 222 55
Middle East Tel: +971 4 450 5800 (Fixed Gas Detection)
Middle East Tel: +971 4 450 5852 (Portable Gas Detection)

OELD SPECIFICATION

ATEX/IECEx (Ex d version)	ATEX/IECEx (Ex e version)
DEMKO 16 ATEX 1693X	DEKRA 17 ATEX 0006X
IECEx [UL 16.0066X]	DEK 17.0011X
Ⓔ II 2 GD	Ⓔ II 2 GD
Ex db IIC T6	Ex eb mb [ia] IIC T5 Gb
Ex tb IIIC T85 °C	Ex tb IIIC T100 °C
Tamb -40 to +65 °C	Tamb -40 to +65 °C
EN 60079-29-1	EN 60079-29-1
Approved Accessory	Approved Accessory

SAFETY APPROVALS

cULus [E484838]
Class I, Div 1, A, B, C & D
Class II, Div 1 F & G, Class III, Div 1
Tamb -55 to +65 °C
Temp Code T6
Class I, Zone 1, AEx d IIC T6
Class I, Zone 21, AEx tb IIIC T6
ISA 60079-29-1
CU TR-Ex (Russian Customs Union), Tamb -60 to +65 °C
Inmetro
NEPSI+
PESO+

MARITIME APPROVALS

Type approved to DNV, BV+, Lloyds+, ABS,
EN 60945 (EMC) IEC 60092-504

OTHER APPROVALS

Bluetooth Certified, Radio Equipment Directive (RED), FCC+, country-specific wireless approvals

BLUETOOTH COMMUNICATION SECURITY

Certificate-based mutual authentication
Encryption to AES128

+Flameproof versions only.

Europe, Middle East, Africa

Life Safety Distribution GmbH
Javastrasse 2
8604 Hegnau
Switzerland
Tel: +41 (0)44 943 4300
Fax: +41 (0)44 943 4398
gasdetection@honeywell.com

Asia Pacific

Honeywell Industrial Safety
7F SangAm IT Tower,
434, Worldcupbuk-ro, Mapo-gu,
Seoul 03922,
Korea
Tel: +82 (0) 2 6909 0300
Fax: +82 (0) 2 2025 0328
India Tel: +91 124 4752700
China Tel: +86 10 5885 8788 3000
analytics.ap@honeywell.com

Americas

Honeywell Analytics Distribution Inc.
405 Barclay Blvd.
Lincolnshire, IL 60069
USA
Tel: +1 847 955 8200
Toll free: +1 800 538 0363
Fax: +1 847 955 8210
detectgas@honeywell.com
RAE Systems by Honeywell
Phone: 408.952.8200
Toll Free: 1.888.723.4800
Fax: 408.952.8480

THE
FUTURE
IS
WHAT
WE
MAKE IT

Honeywell

DSA Suppliers

Thank you for reading this. For pricing or further information, please contact us.

W: <https://dsasuppliers.com>

E: sales@dsasuppliers.com

P: +441158390391

Leading UK Supplier
Brand New & Genuine OEM Parts
Delivered Worldwide



Worldwide Delivery



1000+ Genuine Parts & Equipment

Please Note - The information, product designs & specifications in this document are subject to change without notice.
DSA Suppliers is not responsible for determining the suitability of this product.